


## **Technical specification for parasol - model SLS**

## **Frame**



Opening system

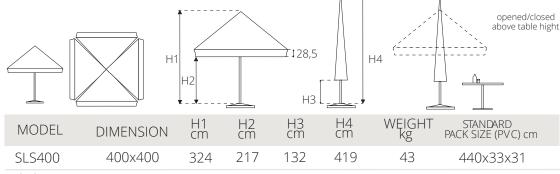

Frame 100% high quality aluminium with combinations of steel components and

with minimum plastic parts included

Standard colour WHITE - Powder coated RAL

Wood imitation and other colours available on request9016

Ribs 100% high quality aluminium (without steel profiles)

Diagonal rib profiles are 40x20/3x1,5mm - providing extra strenght

Middle and supporting ribs are 32x20/1mm

Plastic parts

Minimum participation of extremely strong plastic parts

Central pole Ø 70 mm, thickness 3,0 mm, extremely strong and durable

## **Fabric**

Design

Fabric "ENDURANCE" - woven 100% polyester fiber / 100% Solution Dyed Acrylic fiber

Weight 300 g/m<sup>2</sup>

Panels 4 panels

Valances 4 valances - 28,50 cm (as option)

Attachment to frame Plastic pockets - "tensioner" - providing strong grip between fabric and frame possibility of regulation of cloth tension, easy replaceable at the same time.

According to artwork provided by client

Printing Industrial screen printing, pigmented colors, double side printing effect

UV resistance 7 according to ISO standard (1-8)

Finishing Water repellent, Water resistant, Pollution resistant, Antifungal

Colours Standard colours (Polyester):



Other colours available on request

## **Ventilation**

